

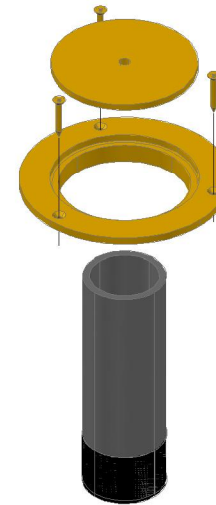


Floating Floor Installations:
Brass Floor Plate Screws on to wood Floor.
Socket is separately grouted into cored floor.

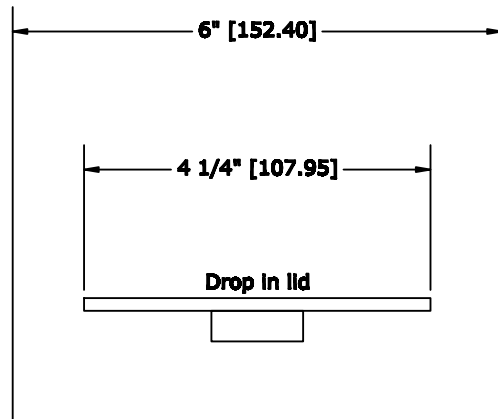

Notes:

- 1. All structural steel shall conform to c.s.s. G40.21 44W or A500 Grade B.**
- 2. All Steel shall be primed and painted with suitable enamel coat. Colour of Black will be used unless otherwise specified.**
- 3. Floor Flange & Lid constructed from solid brass castings, machined to specified dimensions.**

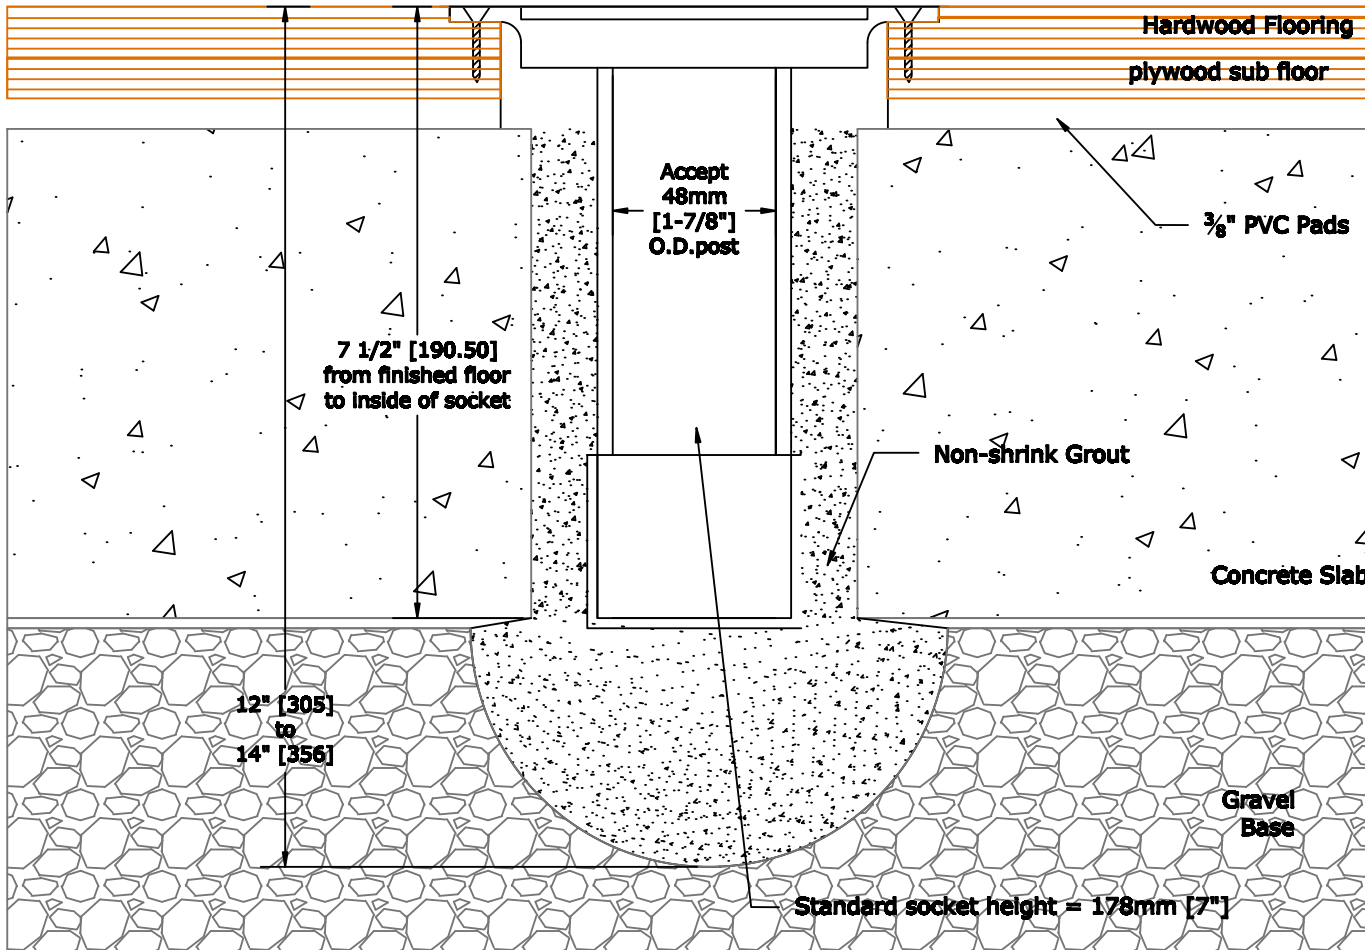

No.	Revision/Issue	Date

Finished Colour of Steel Framework
Primed and Painted Flat Black unless
otherwise specified.

Manufactured By
LOLIMPIN
GYM
EQUIPMENT
Toronto, Ontario, Canada M1R 4Z7
Toll Free 1.800.589.5592 www.lolimpin.com

**LO-V750 Flange lid and
1-7/8" floor socket
for Floating Wood Floors**

File Name LO-V750	Sheet
Date July 25, 2015	LO-V750
Scale N/A	
Drawn By JD	